


**Rotary Tillers, Reverse Tine Rotation**

<b>RTR05 Series</b>		
<b>Model</b>	<b>RTR0542</b>	<b>RTR0550</b>
<b>Recommended Tractor PTO HP</b>	Up to 25 Horsepower (Subcompact Tractors)	
<b>Weight</b>	268#	298#
<b>Tilling Width</b>	42"	50"
<b>Overall Width</b>	46 1/2"	54 1/2"
<b>Hitch Type</b>	Category 0, Category I-Limited, and Category I Fits Land Pride's Category I Quick Hitch	
<b>Offset Capabilities</b>	No	
<b>Number of flanges</b>	5	6
<b>Number of tines per flange</b>	4	
<b>Tine Construction</b>	Alloy steel heat treated "C" shaped blades	
<b>Skid Shoes</b>	Adjustable	
<b>Storage Stands</b>	Adjustable	
<b>Rear Deflector</b>	Adjustable	
<b>Driveline</b>	Category II Off-Center Shear-bolt - standard Slip-Clutch - optional	
<b>Gearbox</b>	25 HP input at 540rpm 1.92:1 ratio Cast iron housing, straight bevel gears	
<b>Gearbox Lubrication</b>	SAE 80-90W EP oil	
<b>Drive Chain</b>	#80 Roller chain - Fully enclosed in oil bath with drain & fill plugs	
<b>Drive Chain Lubrication</b>	Shell Alvania EP 00 or equivalent	
<b>Sprockets</b>	Case hardened teeth, splined bores	
<b>Rotor Swing Diameter</b>	13"	
<b>Rotor Shaft Speed</b>	230 rpm at 540 rpm PTO	

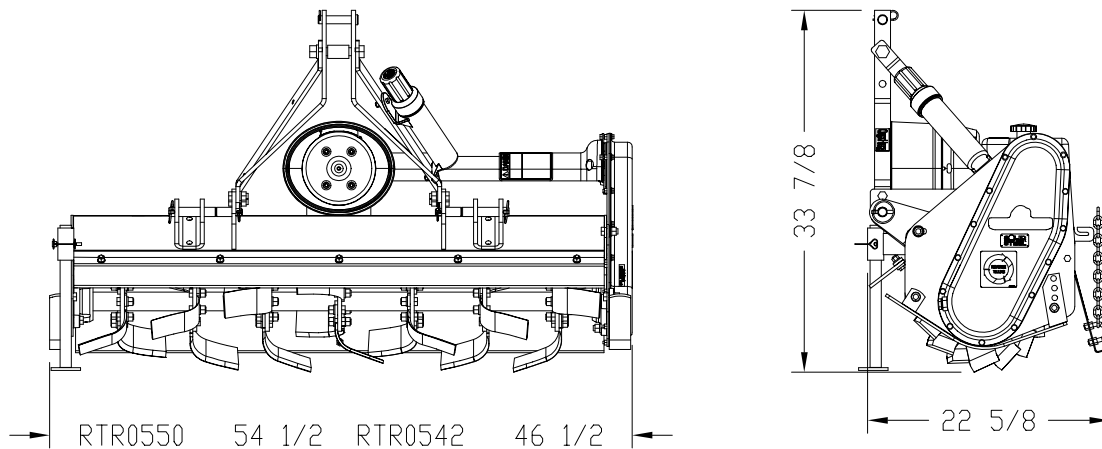

26794

*Designs, specifications, features and information are subject to change without notice.*