



**Rotary Cutters, Single Deck**

<b>RCR15 Series</b>		
	<b>RCR1542</b>	<b>RCR1548</b>
<b>Machine Weight (with Front Guard)</b>	402 lbs.	424 lbs.
<b>Hitch</b>	Category I & Category 1 limited	
<b>Cutting Width</b>	42"	45 1/2"
<b>Overall Width</b>	47 1/2"	53 1/2"
<b>Overall Length (Including Tailwheel)</b>	85 1/4"	91 3/4"
<b>Deck Height (Bottom of Deck to Bottom of Skid Shoe)</b>	7 1/4"	
<b>Cutting Height</b>	1 3/4" - 11 1/2"	
<b>Cutting Capacity</b>	1" (Grass, weeds & light brush)	
<b>Recommended Tractor HP</b>	15-50 HP	
<b>PTO Speed</b>	540 RPM	
<b>Gearbox Rating H.P</b>	50 HP	
<b>Gearbox (Speed up beveled gears)</b>	540 rpm PTO Driven Gearbox 1:1.93 Cast Iron Housing	540 rpm PTO Driven Gearbox 1:1.47 Cast Iron Housing
<b>Gearbox Oil Capacity &amp; Lubrication</b>	4.5 Pints of Gear Lube 80-90W EP	
<b>Deck Construction</b>	One Piece Reinforced Deck	
<b>Deck Material Thickness</b>	12 Gauge	
<b>Skids</b>	1/4" X 2" Weld on	
<b>Stump Jumper</b>	Round Pan 10 ga. x 24"	Round Pan 10 ga. x 24"
<b>Blades (2)</b>	1/2" x 3" Heat Treated Alloy Steel Free-Swinging Blades	
<b>Blade Bolts</b>	Keyed with Harden Flat Washer and Lock Nut	
<b>Blade Tip Speed</b>	11,459 fpm	13,090 fpm
<b>Driveline</b>	ASAE Category 3	
<b>Driveline Protection</b>	Standard 1/2" Center Shearbolt protection Optional - Center Bolt 2 plate Slip Clutch	
<b>Tailwheel</b>	4" x 16" Solid Rubber Tire	
<b>Safety Guards (Optional)</b>	Rubber (front and rear)	

*Designs, specifications, features and information are subject to change without notice.*

# Specifications & Capacities

## Rotary Cutters, Single Deck

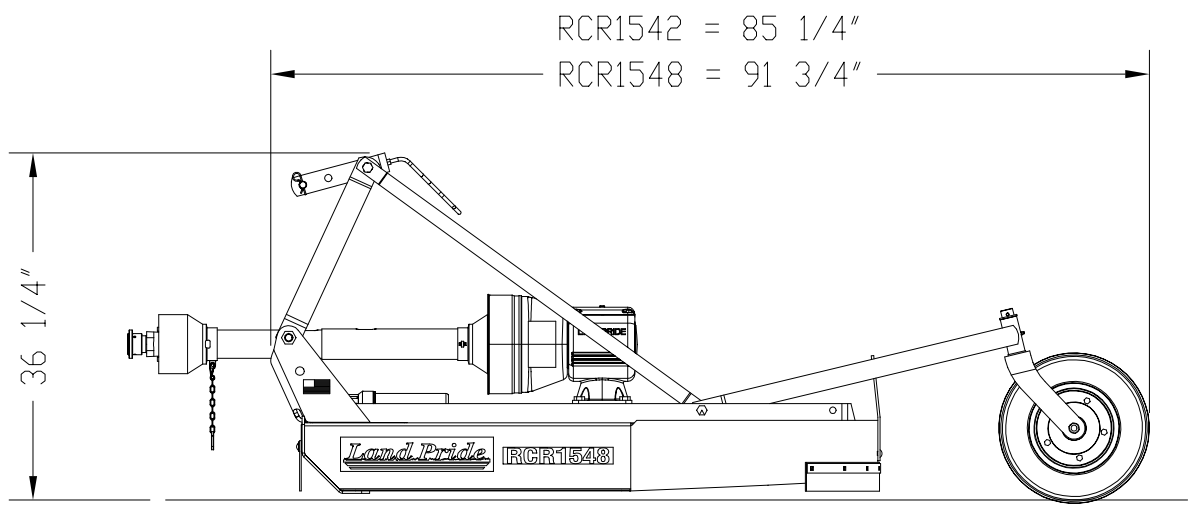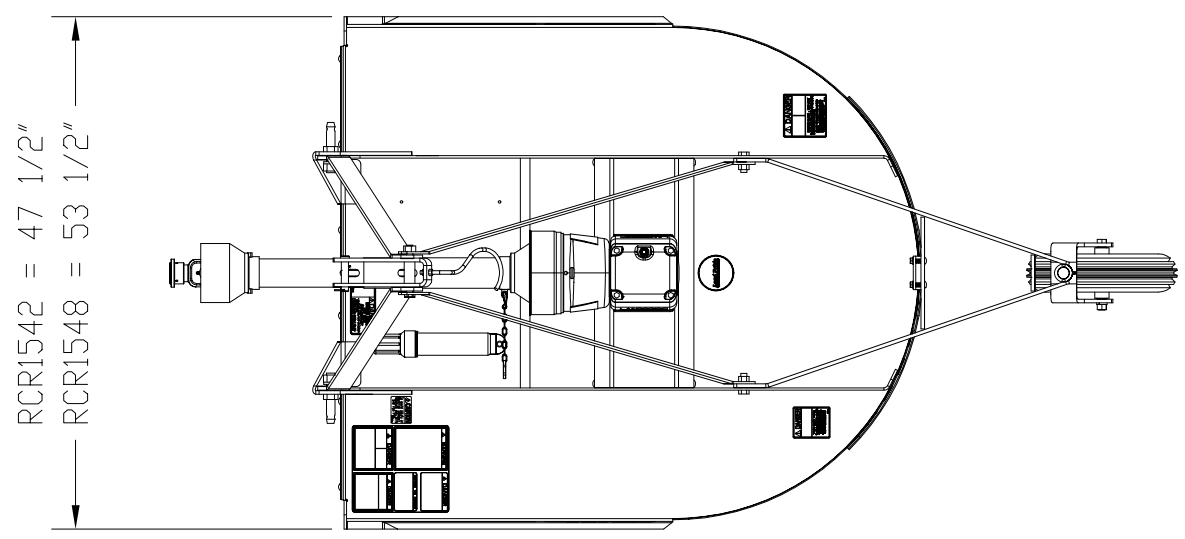

30246

Designs, specifications, features and information are subject to change without notice.