



DB2660 & DBM2660 Models

Specifications & Capacities		
Tractor horsepower	hp (kW)	75 (55.9) Minimum
Minimum tractor lift capacity	lbs (kg)	2500 (1134)
Minimum tractor weight	lbs (kg)	7000 (3175.1) without added weights
Weight	lbs (kg)	1792 (812.8) With front & rear chain guards, side gauge wheel, Ditch Bank mounted speed increaser, & Case weight hanger. Without fluid in reservoir)
Hitch type		Cat. II or Cat. II/III Quick Hitch. Clevis style lower hitch.
Tractor power take-off speed		DB2660 = 540 rpm; DBM2660 = 1000 rpm
Cutting width	in (m)	58 (1.47)
Transport width, minimum	in (m)	10' - 1" (3.07) without gauge wheels
Overall width (fully retracted with optional weight bracket)	in (m)	10' - 3 3/4" (3.14)
Minimum cutting height (Deck level)	in (cm)	2 (5.1) Minimum Maximum is dependent upon 3-point lift height.
Horizontal cutting extension	in (cm)	32 (81.3)
Maximum horizontal reach from center of tractor	in (m)	13'-2" (4.01)
Deck rotation		85° up, 95° down
Blade tip speed	fpm (mps)	15600 (79.2)
Number of blades & size	in (mm)	2, 1/2 (13) x 4 (102)
Blade rotation		Clockwise
Blade bolt	in (cm)	1 1/2 (3.8) With keyway, harden flat washer, and locknut
Dishpan	in (mm)	3/16 (5) X 21 (533) Round, dish-shaped
Cutting capacity	in (cm)	2 (5.1) diameter
Deck thickness	GA (mm)	10 (3.4)
Side skirt thickness	in (mm)	3/16 (5)
Speed Increaser fluid capacity	pints (L)	NOTE: Refer to metal tag on speed increaser for vendor name (BIMA or Comer). Tractor mount, refer to Figure 6-4 on page 46. BIMA = 1 1/2 (.71) Comer = 2 (.95) Ditch Bank mount, refer to Figure 6-5 on page 46. BIMA = 2 (.95) Comer = 1 (.47)
Speed increaser fluid		80-90W EP Gearlube
Hydraulic fluid		Mobilfluid 424 For alternate fluids, search on the web for "Mobilfluid 424" or go to www.mobil.com
Reservoir capacity and filter	Gal (L)	35 (132.5) / conventional 10 micron filter
Method to check oil capacity		Dipstick
Hydraulic fluid flow rate	gpm (Lpm)	15 gpm (approx.)
Overload protection		Hydraulic relief valve
Driveline (optional)		ASAE category 4
Skid shoes	in (mm)	2 1/2 (64) Wide x 1/4 (6) thick & replaceable
Gauge wheel (optional)		4 x 8 Laminated tire with greasable caged roller bearings.
Gauge wheel adjustment		Manual
SMV Sign (Accessory)		SMV decal on galvanized steel back sign and plated or galvanized blade mount.

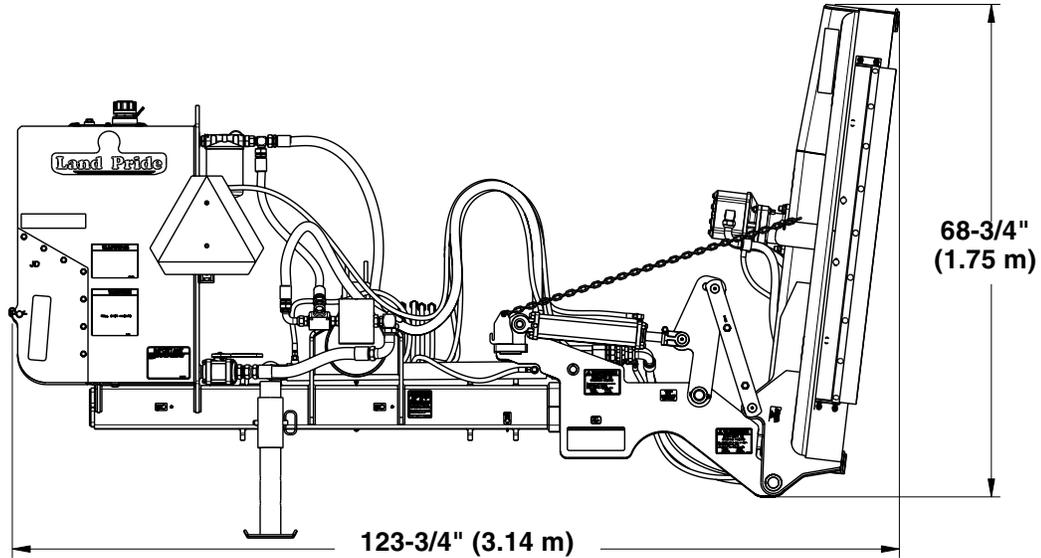

Deck Folded For Transport

37342

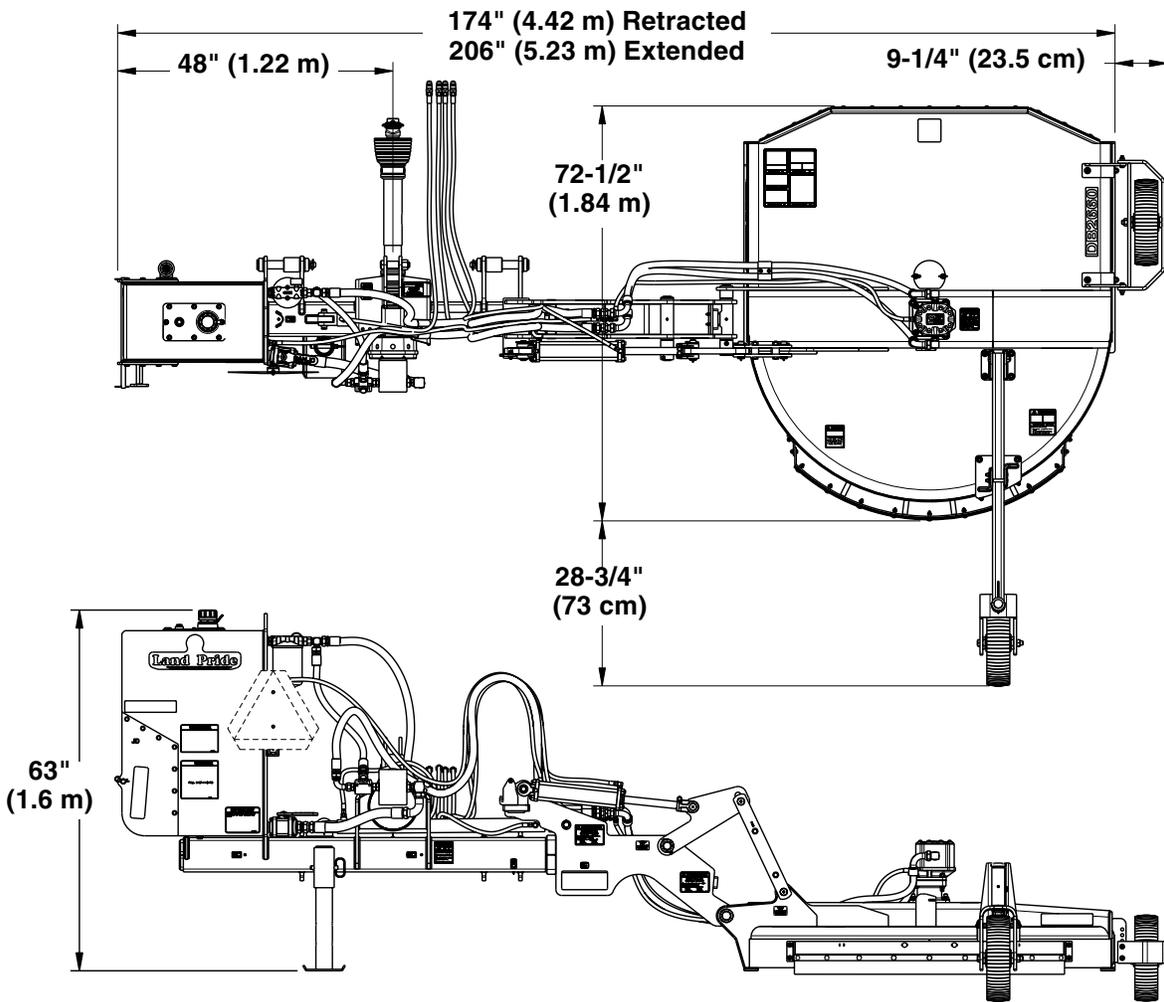

Deck Rotated Down For Parking Unhooked

37343