

# TREKER ST, NT WINDSHIELD

## Application

Before you begin, read these instructions and check to be sure all parts and tools are accounted for. Please retain these installation instructions for future reference and parts ordering information.



## Kit Components:


<u>QTY.</u>	<u>Part Description</u>	<u>QTY.</u>	<u>Part Description</u>
1	Lower windshield assy.	7	Nylon lock nuts
1	Upper windshield assy.	4	Rubber coated lower clamps
7	Screws	1	Instruction sheet
7	Washers	3	Rubber coated top half clamps
4	Rivets		

**IMPORTANT:** Your Land Pride accessory kit is exclusively designed for your Land Pride vehicle. Please read the installation instructions and operator's manual thoroughly before beginning. Installation of any item is easier if the vehicle is clean and free of debris. **Approximate Installation Time:** 30 Minutes

**WARNING: Remove windshield before transporting the vehicle.**

## INSTALLATION INSTRUCTIONS

1. Position lower windshield assembly on the cab frame from the front of the machine, with bottom of windshield resting on the Land Pride vehicle dash. Install brackets over the cab frame tubing as illustrated. Install the fasteners by hand as shown in the illustration. Raise windshield 1/8" (be sure the windshield is not touching the dash of the machine). Once the windshield is in place tighten the four screw, washer, and nylon lock nut assemblies.
2. Prepare the upper windshield for assembly by installing the three top clamps as shown in the illustration using the 1/4-20 x 1" Phillips pan head screws, washers, and lock nuts supplied with this kit. Tighten fasteners to 45 inch/lbs.
3. Install the upper windshield assembly with the rubber straps toward the front, so that the three upper clamps will clasp onto the top of the cab frame. Be sure that the upper windshield assembly is securely seated into the aluminum extrusion. Finally secure the windshield by locking the rubber strap into the plastic cups as shown in the illustration.

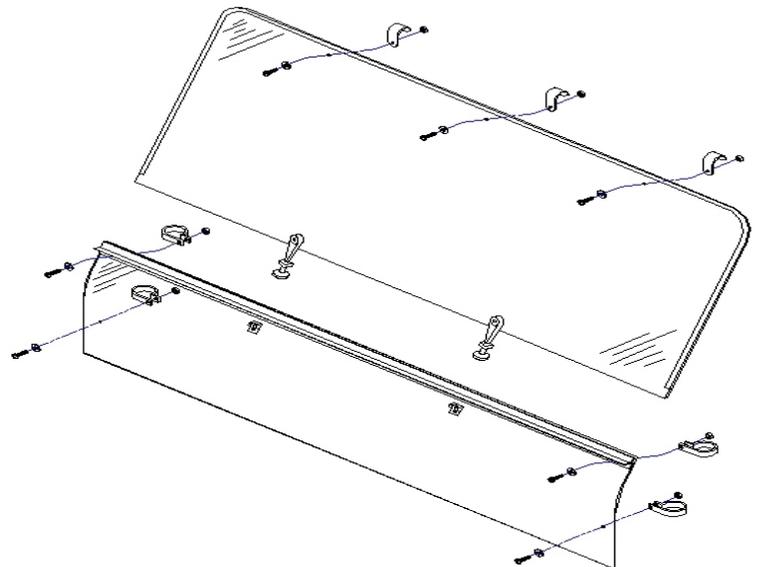

**STORAGE INSTRUCTIONS:** Remove the upper windshield assembly, rotate it 180 degrees, and place it on the back of the cab frame so that the two rubber straps face backward and the three clamps are securely fastened onto the back frame bar. Mount two plastic strap cups on the two rear seat backs with the rivets that were supplied in this kit. This will require you to drill four 11/64" holes in the seat back, use the cups as a template for hole location. Be sure to mount the cups in a position that will allow for enough tension to securely hold the windshield to the cab frame and seat backs while vehicle is in use. This storage location may not work with other accessories.

**IMPORTANT:** To prevent degrading the windshield and hardware, clean the windshield with mild soap and water only. Do not use glass cleaners and solvents such as ammonia, alcohol, and petroleum distillates.