

Rotary Cutters, Single Deck



SC26 Series (Skid Steer)

Description	SC2660	SC2672
Cutter Weight Without Gauge Wheel	1004 lbs.	1256 lbs.
Gauge Wheel Weight (Optional)	114 lbs.	
Skid Shoe Weight (Optional)	Standard skid shoes = 15 lbs. Heavy-duty skid shoes = 25 lbs.	
Hitch	Universal floating-hitch mounting plate. Hitch plate can be mounted centered on the deck or mounted to offset the deck to the right 8 1/2".	
Cutting Width	60"	72"
Overall Width	65 1/2"	78"
Overall Length	73"	91"
Cutting Height	1 1/2" to 18" infinitely variable.	
Cutting Capacity	2" Diameter	
Gearbox Oil Capacity & Lubrication	Does Not Apply	6 Pints of EP 80-90 Wt. Gearlube
Spindle Hub Oil	EP 80-90 Wt. Gearlube	Does Not Apply
Low Volume Drive Motor	11-16 gpm flow	Not Available
Medium Volume Drive Motor	17-21 gpm flow	
High Volume Drive Motor	22-27 gpm flow	
Hydraulic Pressure	1500 to 3500 psi.	
Deck Thickness	Upper Deck = 16 Ga. Lower Deck = 10 Ga.	
Side Skirt Construction	1/4" Steel	
Deck Wear Protection (Optional)	Optional four corner mounted skid shoes.	
Skid Shoes Construction (Optional)	Standard-duty skid shoes = 1/4" x 2" steel Heavy-duty skid shoes = 3/8" x 3" steel	
Dishpan	Heavy duty round pan stump jumper.	
Blade Size	1/2" x 4" updraft.	
Blade Rotation	Clockwise	
Blade Bolt	1 1/8"-12 x 3 7/16" with key.	
Low Volume Motor Blade Tip Speed	18,540 fpm at 16 gpm.	Not Applicable
Medium Volume Motor Blade Tip Speed	18,850 fpm at 21 gpm.	17,200 fpm at 21 gpm.
High Volume Motor Blade Tip Speed	19,000 fpm at 27 gpm.	18,550 fpm at 27 gpm
Front Deck Protection	Single row chain guard.	
Rear Deck Protection	Double row chain guard.	
Deck Lift Height Protection	Safe chain limiter.	
Operator Protection (Optional)	Protective door shield.	
Cutting Height Gauging (Optional)	Pivoting and adjustable front mounted gauge wheel with laminated tire.	

Designs, specifications, features and information are subject to change without notice.

Specifications & Capacities

Rotary Cutters, Single Deck

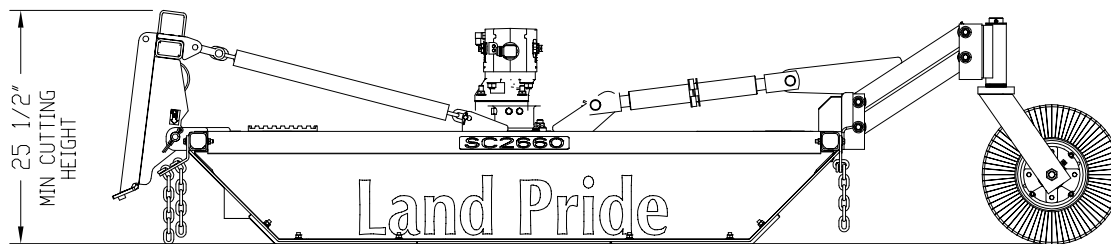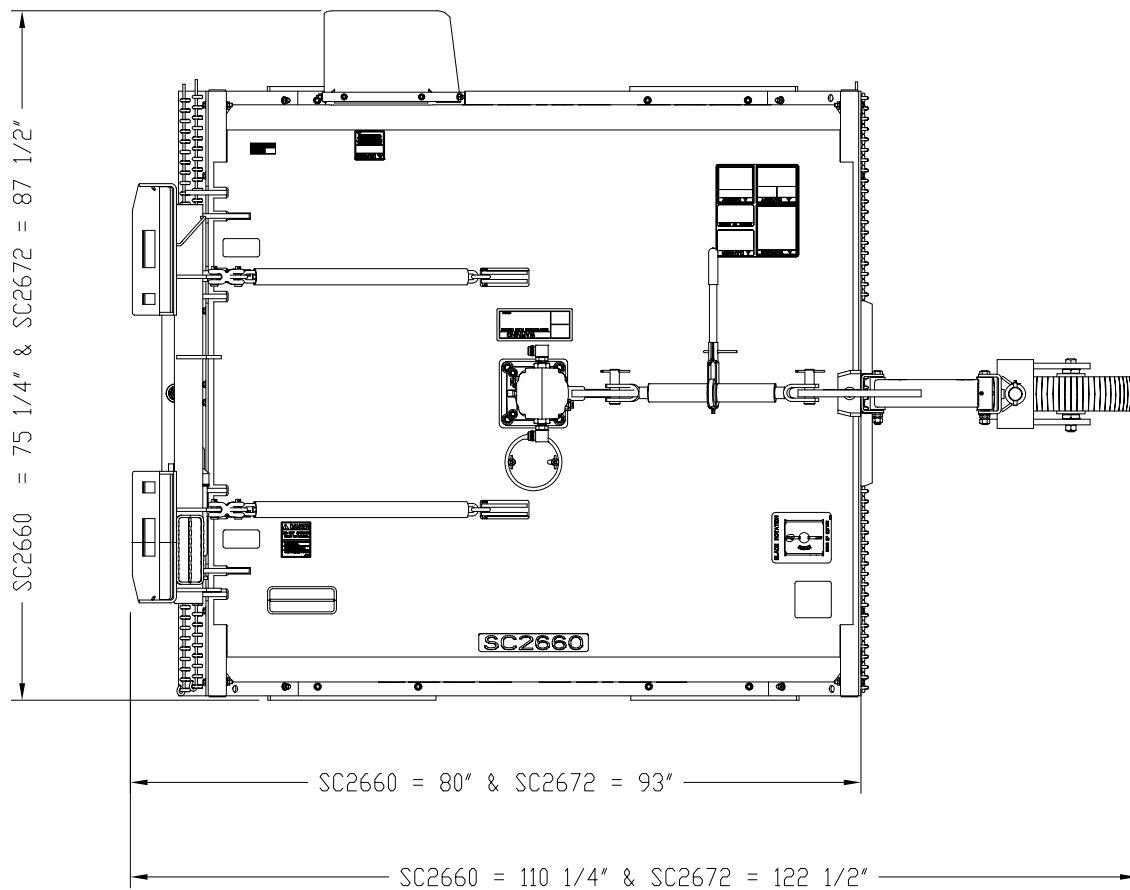

26819

Designs, specifications, features and information are subject to change without notice.